

## MODEL EL-USB-RT TEMP/RH REAL-TIME DATA LOGGER

When plugged into the USB port of a PC installed with the purpose designed software under Windows 2000, XP and Vista, EL-USB-RT measures temperature and relative humidity from -20 to +70°C (-4 to +158°F) and 0 to 100%RH. The PC displays the temperature, humidity and dew point (the temperature at which water vapor present in the air begins to condense) in real-time and saves it to a file which can store up to 7 day's worth of data. This data file is overwritten at the beginning of each new logging session. The software provides the option for the user to save the data file permanently to the hard-drive. Temperature, relative humidity and dew point can be graphed, printed and exported to other applications.

### FEATURES

- -20 to +70°C (-4 to +158°F) Measurement Range
- 0 to 100%RH Measurement Range
- Dew point indication via Windows Control Software
- USB Interface
- User-Programmable Alarm Thresholds for T & RH%



### WINDOWS CONTROL SOFTWARE

Easy to install and use, the control software runs under Windows 2000, XP (Home and Professional Editions) and Vista. It provides an environment whereby the user can view the current temperature and humidity and graph either the current data file or previously saved files. Users can set up high and low alarms within the software which can send e-mails, text alerts or audible alarms via the PC's internal speaker. The software can also show the current temperature and humidity in the notification area within the Window's tool-bar. Right-clicking on the EL-USB-RT icon in the notification area enables the user to access the full functionality of the software.

### SET-UPS

- °C, °F
- High and Low Alarms for Temperature and Humidity
- E-mail Alert / Data set settings
- Text Message Alert settings
- Mute PC's Alarm Beep
- Show Readings / Icon in Notification Bar

### ORDERING INFORMATION

**Standard Product**  
(Data Capture Device, Software on CD)

**Stock Number**  
**EL-USB-RT**

### SPECIFICATIONS

Specification	Min.	Typ.	Max.	Unit	
Temperature	Measurement range *	-20 (-4)	+70 (+158)	°C (°F)	
	Repeatability		±0.3 (±0.6)	°C (°F)	
	Accuracy (overall error)		±1.5 (±3)**	°C (°F)	
	Response time		20	30	sec
Relative Humidity	Measurement range	0		100	%RH
	Repeatability (short term)		±0.5		%RH
	Accuracy (overall error) (20-80%RH)		±4.5		%RH
	Response time		5		sec
	Long term stability		1		%RH/Yr
Dew Point	Accuracy (overall error) (25°C, 40-100%RH)		±2.5 (±5)		°C (°F)
Logging rate		1 sec			
Operating temperature range	-20 (-4)		+70 (+158)	°C (°F)	

\* Range to -40 to +90°C (-40 to +194°F) for occasional use

\*\* Stated accuracy correct following 15 minutes temperature stabilisation in environment

*The Authority in Unrestricted Data Logging.*

LOGIC BEACH INCORPORATED

8363 - 6F Center Drive La Mesa, CA 91942

Tel: 619-698-3300

Fax: 619-469-8604

www.logicbeach.com

Specifications liable to change without prior warning


EL-USB-RT Issue 4

June 2008

B.S.

## MODEL EL-USB-CO (CO) CARBON MONOXIDE DATA LOGGER

### DIMENSIONS All dimensions in mm

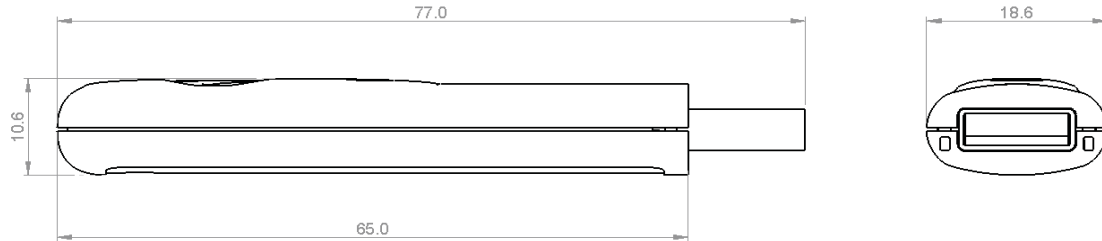

*The Authority in Unrestricted Data Logging.*

LOGIC BEACH INCORPORATED

8363 - 6F Center Drive La Mesa, CA 91942  
www.logicbeach.com

Tel: 619-698-3300

Fax: 619-469-8604

*Specifications liable to change without prior warning*

EL-USB-RT Issue 4

June 2008

B.S.